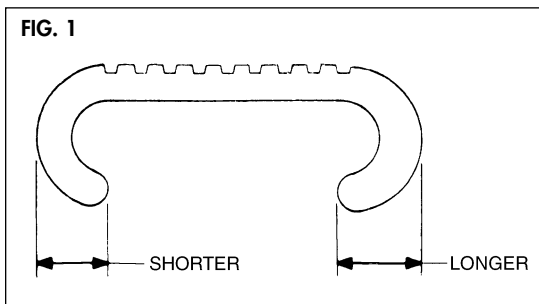


Traction/Comfort Step Treads

1. Read instructions completely before starting.
2. Place step tread into a pail of hot tap water (approx. 120°F) and let it warm up for 3-5 minutes.
3. Using a rubber glove, remove the step tread from the water. Hook the longer leg of the tread under the stainless steel ladder rung as illustrated in Figures 1 & 2.
4. Snap the step tread onto the ladder rung by applying pressure on one end with both hands and then working to the opposite end.
5. Check to ensure that the step tread is completely seated onto the ladder rung along its entire profile before using.

FIG. 1**FIG. 2**