



Instructions for: Side Mount Table Hardware

12.601

Installation Instructions:

1. Locate mounting bracket in desired location (note: bracket is made with a 3 degree slant to accommodate most boat surfaces. If the surface that the bracket is being mounted due is greater or less than 3 degree the bracket will need to be shimmed in order to make a level table).
2. Ensure bracket is level, at the desired height, and mount to the boat surface using 1/4" marine grade pan headed fasteners (Note: fasteners are not provided due to the large variety of mounting surfaces and thicknesses).

Caution: Insure area behind bracket is free of from obstacles such as fuel tanks, hoses, electrical wires, etc.


It is recommended that a backer plate or a suitable substrate be used to handle table loading. See boat manufacturer recommendations for location or specific needs.

Operation Instructions:

1. To insert table assembly pull back on mounting bracket locking knob and insert side mount table leg until it is wedges securely in place.
2. To remove table assembly pull back on mounting bracket locking knob and pull up on table leg.

Maintenance:

1. Periodically check and tighten all mounting hardware attachment points.
2. Ensure cleanliness of equipment to prevent dirt, rocks, or debris from damaging sliding surfaces.

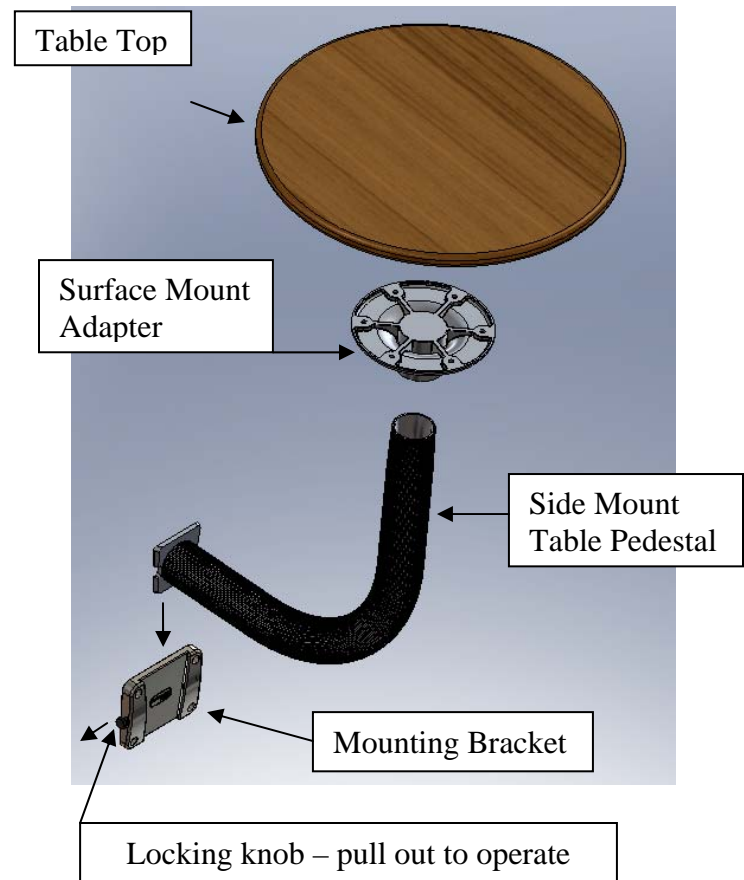

Write for
A complete
EEz-In Catalog

GARELICK
644 2ND Street, PO Box 8
St. Paul Park, Minnesota 55071

Phone: 651-459-9795
E-mail: mail@garelick.com
Website: www.garelick.com

02/08